

Log Grapple Attachment

Lift more, load more with Doosan log grapples.


 Designed to work harder, last longer and perform better in the field or in the yard, Doosan log grapples deliver the power and performance you need to lift more, load more and be more profitable.

Superb Durability and Serviceability in Extreme Conditions

- T1 steel construction
- Large diameter, induction-hardened pins
- Easy-to-replace, induction-hardened steel bushings
- Heavy-duty, high-pressure, bolted-head hydraulic cylinders
- Large diameter slewing ring with removable guarding
- Bolt-on component guards for additional protection

Productivity Boosting Performance and Flexibility

- Counterbalance-style load holding valves on cylinders hold payload securely, automatically
- High-torque rotation motor with exceptional service life
- Available in 52 in. and 58 in. arm openings

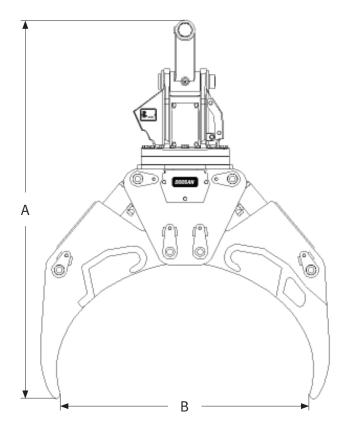

		LG52	LG58
Approved Carriers		DX225LL	DX300LL
Height	А	70 in. (1,778 mm)	74 in (1,880 mm)
Weight		2,200 lb. (998 kg)	2,280 lb. (1,034 kg)
Open	В	52 in. (1,321 mm)	58 in. (1,473 mm)
Closed		6 in. (152 mm)	6 in. (152 mm)
Rotation		10 rpm	10 rpm



For more information visit www.doosanequipment.com

Doosan® is a registered trademark of Doosan Corp. in the United States. © 2011 Doosan Infracore Construction Equipment America. All rights reserved.

D-1003 (7/11) Kπ-2M-711-25025-F

^{*}Machine as shown may not meet all rules and regulations applicable to logging applications. Check rules and regulations that could apply to use of the Log Grapple.